

PSU24-5

Intelligent Power Supply Unit



Description

To support heavy consumption application, part of the fire alarm devices require for external 24VDC power supply. PSU24-5 Intelligent Power Supply Unit is the suitable choices. The supply source is 230 VAC, 50/60 Hz. Be able to output 26.5VDC/5A. The built-in charger and maintenance-free sealed lead acid batteries ensure the standby supply.

Features and Benefits


- Seamless convert between mains and standby power sources.
- Battery rechargeable with temperature compensation. Charging current is 1A. Maximum battery capacity is 12Ah sealed lead acid battery.
- Battery over-discharge protection.
- Indication of output voltage, output current, mains fault, battery fault, output fault and charger fault.
- Local audio fault indication.

Ordering Information

Part No.	PSU24-5
Device Name	Intelligent Power Supply Unit
Product No.	10103014

Installation Data

PSU24-5 power supply unit is wall-mount/flush-mount combined. Its appearance and the mounting holes are shown here.

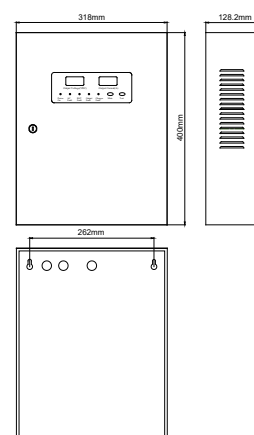

Technical Specification

Mains Power	230VAC ^{+10%} _{-15%} , 50/60Hz
Battery Size	24VDC /12Ah
Rated Output	5A/26.5V DC
Ingress Protection	IP20
Operating Environment	Temperature: 0°C ~ +40°C Relative humidity ≤95%, non condensing
Dimension	400mm × 318mm × 128mm

PSU24-5A

Intelligent Network Power Supply Unit



Description

To support heavy consumption application, part of the fire alarm devices require for external 24VDC power supply. PSU24-5A Intelligent Network Power Supply Unit is the suitable choices. The supply source is 230 VAC, 50/60 Hz. Nominal output load is 5A/24VDC. The built-in charger and maintenance-free sealed lead acid batteries ensure the standby supply.


With additional addressable feature, PSU24-5A is also possible to be connected into fire alarm loop. With the address control, it is able to report fault of mains loose, battery loose or output broken to the fire panel.

Features and Benefits

- Seamless convert between mains and standby power sources.
- Battery rechargeable with temperature compensation.
Charging current is 1A. Maximum battery capacity is 12Ah sealed lead acid battery.
- Battery over-discharge protection.
- Indication of output voltage, output current, mains fault, battery fault, output fault and charger fault.
- Local audio fault indication.


Installation Data

PSU24-5A power supply unit is wall-mount/flush-mount combined. Its appearance and the mounting holes are shown here.

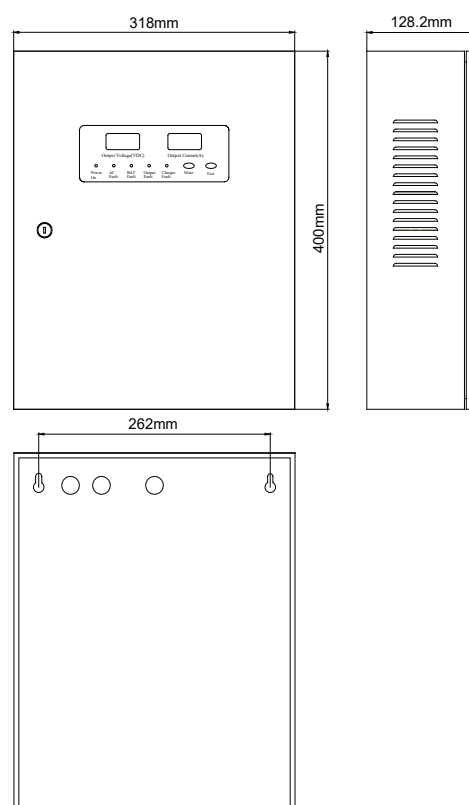

Terminals

The terminals of the PSU are shown below.

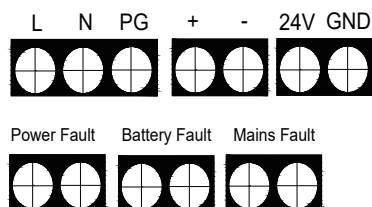

L, N, PG: AC input

+, -: Battery input

24V, GND: 24VDC output

Z1, Z2 (on the display board): Loop connection

Power Fault: 24VDC fault contact, 30VDC/2A

Battery Fault: Battery fault contact, 30VDC/2A

Mains Fault: Mains fault contact, 30VDC/2A

2.0mm² or above fire cable is recommended for 24VDC line, 1.0mm² or above fire cable is recommended for other signal lines, but subject to local codes.

Ordering Information

Part No.	PSU24-5A
Device Name	Intelligent Power Supply Unit
Product No.	10103145

Technical Specification

Mains Power	230VAC ^{+10%} / _{-15%} , 50/60Hz
Battery Size	24VDC /12Ah
Rated Output	5A/26.5V DC
Programming	Electronically addressing, from address 1 to 242
Ingress Protection	IP20
Operating Environment	Temperature: 0°C ~ +40°C Relative humidity ≤95%, non condensing
Dimension	400mm × 318mm × 128mm

Compatible Panels

GST-IFP8 Intelligent Fire Alarm Control Panel
GST200-2 Series Intelligent Fire Alarm Panels
GST200N Series Intelligent Fire Alarm Panels

Accessories and Tools



Part No.: P-9910B
Device name: Handheld Programmer
Product No.: 10104894