

## HPS-SAH-WP Explosion Proof Manual Pull Station



### STANDARD FEATURES

- Weatherproof Manual Pull Station
- 10 A, 120 VAC contacts
- Rugged die-cast aluminum housing
- Neoprene sealing gasket
- Corrosion-resistant construction
- Hex reset
- Latching pull-down lever
- Screw terminal connections

### SPECIFICATIONS

<b>Model</b>	HPS-SAH-WP
<b>Contact</b>	(1) Form A
<b>Contact Rating</b>	10A @ 120 VAC
<b>Operating Temperature</b>	-30°F (-35°C) ~ 150°F (66°C)
<b>HPS-BB Dimension</b>	1-3/4" Backbox

#### PRODUCT LISTINGS



California State  
Fire Marshal  
7150-0410:162

### DESCRIPTION


The Hochiki HPS-SAH-WP Weatherproof Manual Pull Station is a UL Listed fire alarm initiating device suitable for applications requiring outdoor mounting of the manual fire alarm pull station. The HPS-SAH-WP is appropriate for applications where the manual pull station may be subject to wet conditions.

The HPS-SAH-WP consists of a die-cast aluminum back box, Neoprene sealing gasket and a special manual fire alarm box. The unit is a high quality pull station constructed entirely of nontoxic materials with a low profile and rounded edges to fit most design requirements. All components are pre-painted, or have plated surfaces to inhibit corrosion.

The latching pull-down lever on the HPS-SAH-WP requires a hex key to reset it. This allows only authorized personnel to reset the manual pull station so that the origin of the alarm can be determined easily.

The HPS-SAH-WP has one set of Normally Open contacts rated for 10A @ 120 VAC, making the device suitable for installations involving large current loads.

The HPS-SAH-WP conforms with the Americans with Disabilities Act (ADA).

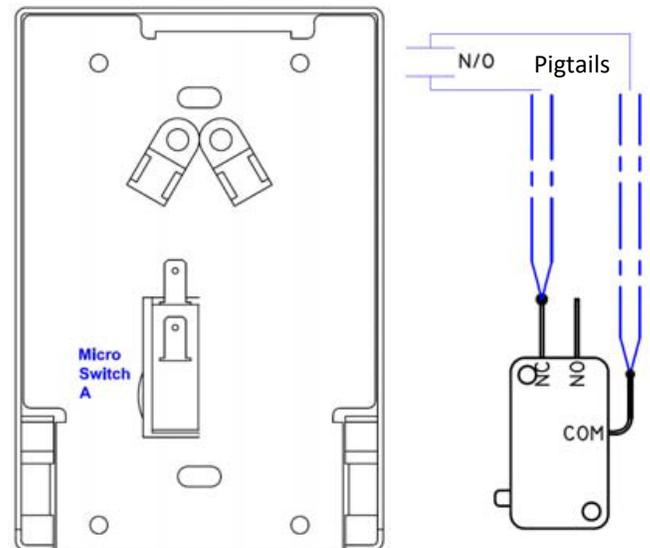

Specifications subject to change without notice.